

# Mojo 65 48V VWD | 21.6W

## Product Reference

Environment Indoor

Installation Track Mounted

## Construction & Materials

Housing Aluminium

Primary Lens -

Primary Reflector PC metallised

Secondary Reflector Anodised

Body Finish White,Black

Diffuser -

Antiglare Baffle -

## Thermal Management

Heat Sink Material Die cast Aluminium

Cooling Technique Passive Cooling

## Optical System

Beam Direction Adjustable

Tilt Yes

Swivel Yes

## Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included

Mounting Integral

LED Power Watts 21.2W

System Power Watts -

Operating Voltage Vin 48V


Power Factor p.f. >0.95

## Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	<b>Mojo 65 48V VWD</b>	<b>21.6W</b>	<b>WW27K</b>	<b>CR180</b>	<b>51°</b>	<b>SWH</b>	<b>On/Off</b>

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT	CRI	ANGLE	FINISH	CONTROL
<b>Mojo 65 48V VWD</b>	<b>21.6W</b>	2428	115	2700K	<b>WW27K</b>	51°	White	Non Dimmable <b>On/Off</b>
		2499	118	3000K	<b>WW30K</b>		Black	
		2618	123	4000K	<b>NW40K</b>		<b>SBL</b>	
		2666	126	5700K	<b>CW57K</b>			
				2700K-5700K	<b>TW</b>			
<b>Mojo 65 48V VWD</b>	<b>21.6W</b>			<b>WW27K</b>	<b>CR180</b>	<b>51°</b>	<b>SWH</b>	<b>On/Off</b>

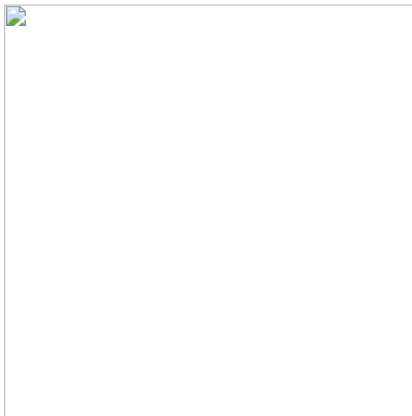

## Light Distribution

## LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 >50000 hours

Colour Rendering (CRI) CR180,CR190

Led Type COB

LED Fitted Cree COB LED 33V-36Vdc/600mA

## Controls

Standard Switchable On/Off

Optional DDIM,BT,M,CASAMBI