

# Ovo 48V | 10.8W

## Product Reference

Environment Indoor

Installation Track Mounted

## Construction & Materials

Housing Aluminium

Primary Lens PMMA

Primary Reflector PC metallised

Secondary Reflector -

Body Finish White,Black

Diffuser -

Antiglare Baffle -

## Thermal Management

Heat Sink Material Die cast Aluminium

Cooling Technique Passive Cooling

## Optical System

Beam Direction Fixed

Tilt No

Swivel No

## Electrical System

Driven with Constant Voltage Driver

Input Voltage/Hz 48V

Control Gear Included


Mounting Remote

LED Power Watts 10.4W

System Power Watts -

Operating Voltage Vin 48V

Power Factor p.f. -

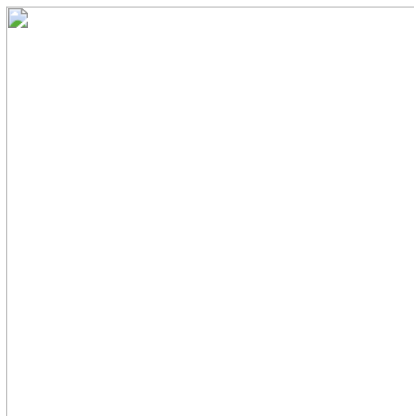

## Light Distribution

## LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 &gt;50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type COB

LED Fitted Cree COB LED 33V-36Vdc/300mA

## Controls

Standard Switchable On/Off

Optional DDIM,BTDM,CASAMBI,Non Dimmable

## Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	<b>Ovo 48V</b>	<b>10.8W</b>	<b>WW27K</b>	<b>CRI80</b>	<b>32°(MD)</b>	<b>SWH</b>	<b>On/Off</b>

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT		CRI	ANGLE	FINISH		CONTROL	
<b>Ovo 48V</b>	<b>10.8W</b>	957	92	2700K	<b>WW27K</b>	<b>CRI80</b>	32°(MD)	White	<b>SWH</b>	Non Dimmable	<b>On/Off</b>
		988	95	3000K	<b>WW30K</b>	CRI90	42°(WD)	Black	<b>SBL</b>	Dali Dimmable	<b>DDIM</b>
		1040	100	4000K	<b>NW40K</b>					Bluetooth Dimmable	<b>BTDM</b>
		1061	102	5700K	<b>CW57K</b>					Casambi	<b>CBTM</b>
				Warm to Dim	<b>W2D</b>						
<b>Ovo 48V</b>	<b>10.8W</b>			<b>WW27K</b>		<b>CRI80</b>	<b>32°(MD)</b>	<b>SWH</b>		<b>On/Off</b>	